


REQUIREMENTS:

1:100% short,open and miss wire test.

PIN OUT

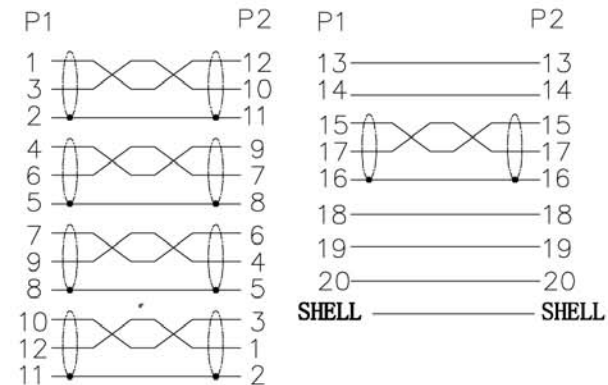

⑥	DUST CUP	LDPE DUST CUP FOR DP MALE.	2	PCS
⑤	OUTER MOLDED	BLACK 45P PVC	0.024	KG
④	INTER MOLDED	LDPE	0.008	KG
③	COVER	ABS OUTER COVER FOR DP MALE,HOOK TYPE,BLACK	2	PCS
②	CONNECTOR	DISPLAYPORT 20PIN MALE,HOOK TYPE,GOLD PLATED CONTACTS AND SHELL,BLACK INSULATION	2	PCS
①	CABLE	(7/0.10TC*1P+7/0.10TC+FAM)*5C+7/0.10TC*5C+AL+D(7/0.10TC)+B(80/0.12 AL-MG)JACKET:BLACK PVC,OD:6.0±0.2MM MARKING: DisplayPort Cable E119932-T 3 AWM STYLE 20276 80℃ 30V VW-1 Copartner	5000	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Ltemref	Quantity	Title/Name,designation,material,dimension etc			Article No./Reference	
Designed by	Checked by	Approved by - date JUNE 17.2013	File name	Date JUNE 17.2013	Scale FREE	
ANGLE: 				DP M/M 30# 5M		
UNIT:MM				26-6050		Edition 1